



Industrial Jeans Processing Equipment

Wrinkle Press Machine 压皱机 GUB Circular Vacuum Wrinkle Press Machine 圆形吸风压皱机 GV Magic Wrinkle - Press Machine 魔术压皱机 GW tretch Wrinkle Press Machine 伸缩猫须压皱机 GM Stereo Wrinkle PressMachine 平压猫须机	P25
Manual Brushing Machine -- for Jacket and Jeans 手动擦衫/裤机 GT Manual Brush Jeans Machine-- Vertical Type 立式擦裤机 GL Manual Brush Jacket Machine 擦衫机 GT-H Manual Brush Jeans Machine -- Horizontal Type 卧式擦裤机 Standard 支撑架 Denim Destroyer 磨裤机 GK Wrinkle Worktable 猫须工作台	P26
GC Water Curtain Spraying Machine 水帘柜	P27
GF Hot & Cool Air Blaster 冷热风鼓 Unit Pant Machine 反裤机 Thread Cleaning Machine 强力吸线头机	P28
GO Wrinkle Free & Permanent Press Oven 抗皱免烫定型柜	P29-30

Wrinkle Press Machine 压皱机




With 3D effect on the finishing product
有3D效果

GUB Circular Vacuum Wrinkle Press Machine
圆形吸风压皱机





GW Stretch Wrinkle Press Machine
伸缩猫须压皱机

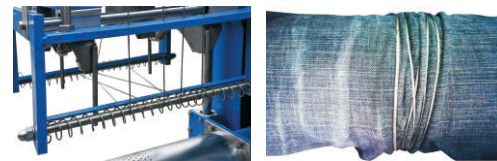

GV Magic Wrinkle - Press Machine
魔术压皱机

36 molds for optional
36种模具可选



GM Stereo Wrinkle Press Machine
平压猫须机

Manual Brushing Machine -- for Jacket and Jeans 手动擦衫/裤机




GT-1 Fixed Height
固定高度
GT-2 Adjusted Height
可调节高度

GT Manual Brush Jeans Machine
-- Vertical Type 立式擦裤机



GT-H Manual Brush Jeans Machine
-- Horizontal Type 卧式擦裤机

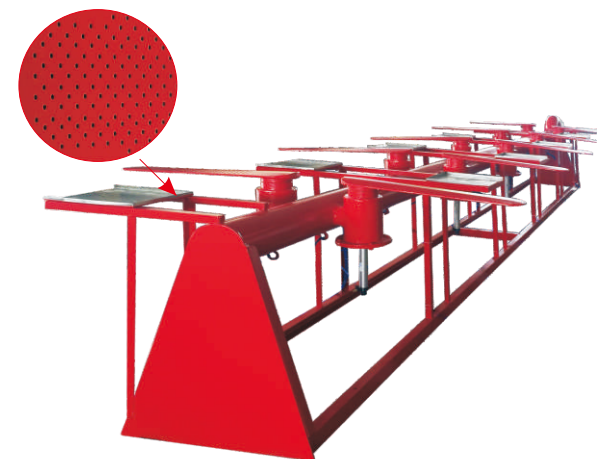

GK Wrinkle Worktable
猫须工作台



GL Manual Brush Jacket Machine
擦衫机



Standard
支撑架



Denim Destroyer
磨裤机



GC Water Curtain Spraying Machine
水帘柜

FEATURES

- ▶ Curtain spraying machine is an ideal environmental equipment for chemical spraying works.
- ▶ Through the water pump to make a circle water curtain, the waste gas and smell which come out during spraying will be instantly crashed into the water curtain and fall down the bottom pool, and also absorbed by the top exhaust fan so that achieve the effect of purify the working environment.

水帘柜是引进国外先进技术研究出来的新型牛仔服装加工设备。
整个操作系统：处理过程在处理柜里进行，在处理柜里装有一把抽风扇和一个循环式的水帘，吸收喷药时和处理过程中产生的微粒，从以得到净化环境和空气的作用。



TECHNICAL SPECIFICATION 技术参数

Model		GC-J	GC-I	GC-II	GC-III	GC-IV	GC-V
No. of Manikin 橡胶管数量	pc	1	1	2	3	4	5
Fan Motor Power 风机功率	kw	2.2x1	0.55x1	2.2x1	2.2x2	2.2x2	2.2x3
Circulation Pump Power 抽水泵功率	kw	0.55x1	0.37x1	0.55x1	0.55x1	0.55x2	0.55x2
Water Tank Size 循环水箱体积	mm	2400x500	1200x500	2400x500	300x500	(2400x500)x2	(2400x500)x1 (3000x500)x1
No. of Spray Gun 喷枪数量	pc	1	1	2	2	2	2
Overall size 外形尺寸	mm	2650x1150x2450	1500x1150x2200	2650x1150x2450	3300x1150x2500	5280x1150x2500	5950x1150x2500
Overall Size (with tilting) 外形尺寸（带倾斜）	mm	/	1500x1150x2800	2650x1150x2800	330x1150x2800	5280x1150x2800	5950x1150x2800
Platform Size 接水盘尺寸	mm	2400x1800	1150x1800	2400x1800	3000x1800	(2400x1800)x2	(3000x1800)x1 (2400x1800)x1
Overall Size (with platform) 外形尺寸（有水盘）	mm	2650x2350x2450	1500x2350x2800	2650x2350x2800	3000x2350x2800	5280x2350x2800	5950x2350x2800

GF Hot & Cool Air Blaster
冷热风鼓

FEATURES

- ▶ Hot and cool air blaster is applicable to check samples after washing, which will blast garments into drying immediately.

冷热风鼓适用于水洗衣物时要与样板对比，将服装放在风管上将衣物快速吹干，对版。操作方便，占地位置少。



TECHNICAL SPECIFICATION 技术参数

Model		GF	GF-II	GF-III	GF-IV
Hot Wind Blower 热风风机功率	kw	0.75	0.75	0.75	2.25
Cood Wind Blower 冷风风机功率	kw	0.26	0.375	0.26	0.26
Hot Wind Pipe 热风管数量	pc	2	2	3	4
Cood wind Pipe 冷风管数量	pc	1	2	1	1
Overall Dimension 外形尺寸	mm	1104x810x1150	1400x810x1150	1250x810x1150	1620x800x1150

Unit Pant Machine
反裤机



TECHNICAL SPECIFICATION 技术参数

Motor Power 电功率	kw	4
Input Pressure 输入气压	mpa	0.3-0.8
Size 尺寸	mm	2400x730x1350

Thread Cleaning Machine
强力吸线头机

with drawer / without drawer
抽屉供选择



Suction Nozzle Size 吸嘴尺寸	mm	1500x520x140
Motor Power 电机功率	mpa	2.2/4
Size 尺寸	mm	590x590x1000

GO

Wrinkle Free & Permanent Press Oven
抗皱免烫定型柜


FEATURES

Wrinkle Free and Permanent Press Oven is adopted American advanced technique. This oven can deal with all type of clothes approval under high temperature; clothes will remain smooth and not folding forever. Oven is controlled by computer system with facilitated and safe operation.

- ▶ Temperature range: 0~200℃, the best maximum temperature is 150~160℃. Temperature difference around 5℃
- ▶ Two s/s carts for processing and Preparations.
- ▶ Initial heating time for the first cycle is 45minuts; the second cycle and next further cycle is 25minuts.


抗皱免烫定型柜是公司引进美国的先进技术和工艺进行开发的产品，是一种衣物免烫定型的理想设备，对衣物进行高温定型，能达到永久平整，永不皱褶。本设备由先进的电器系统控制，操作安全方便。

- ▶ 抗皱免烫定型的温度范围：0~200℃，最合适的温度范围：150℃~160℃，柜上下温差相差5℃。
- ▶ 配有两台不锈钢挂车，节省操作时间，全不锈钢，耐用，耐酸耐碱。
- ▶ 不锈钢内板里有隔热棉，保留温度，节省能源。

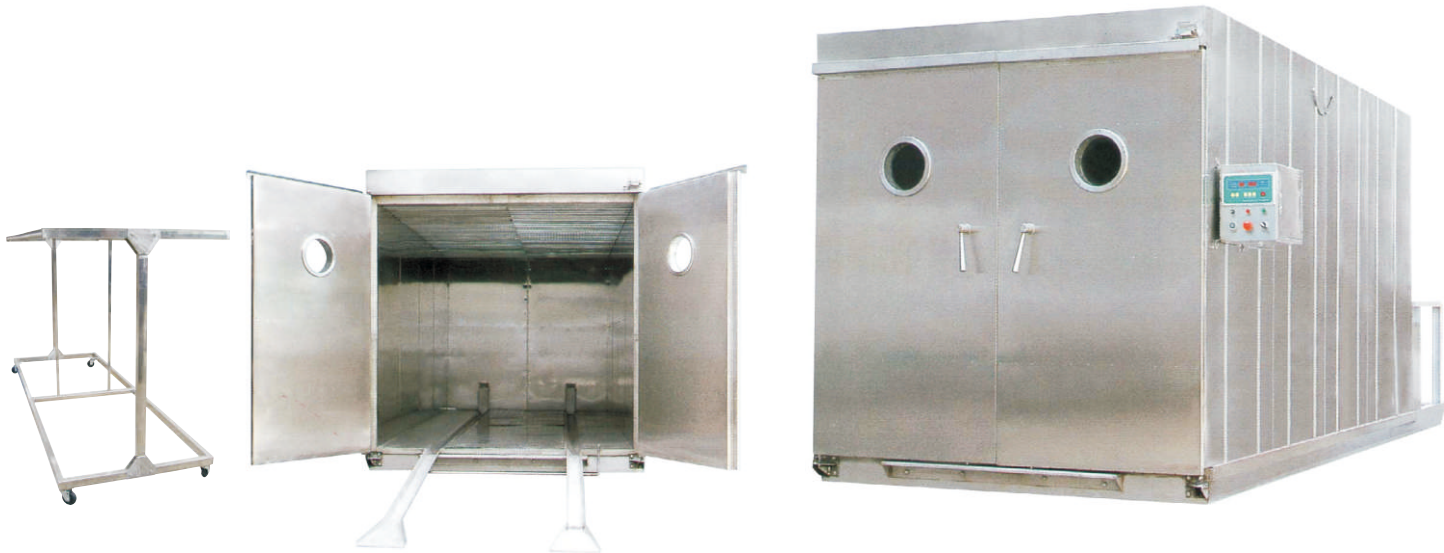

ELECTRICITY RESOURCES 电加热

Model	GO-30	GO-60	GO-90	GO-120	GO-150
Basket Capacity 容量	pcs30	60	90	120	150
Basket Dim. 装货内胆尺寸	mm1260x1100x1720	1640x1610x1700	2400x1820x1720	3150x1820x1720	2920x1820x1720
Main Motor 循环风机功率	kw2.2	3	4	4	5
Exhausting Motor 恒温风机功率	kw0.37	0.37	0.37	0.37	0.37
Electricity Consumption 耗电量	kw27	45	54	63	90
Overall Dimension 外形尺寸	mm2530x1520x2465	2950x2010x2500	4500x2220x2570	4430x2290x2500	5300x2290x2500
Net Weight 净重	kg1310	1890	2470	2990	3320

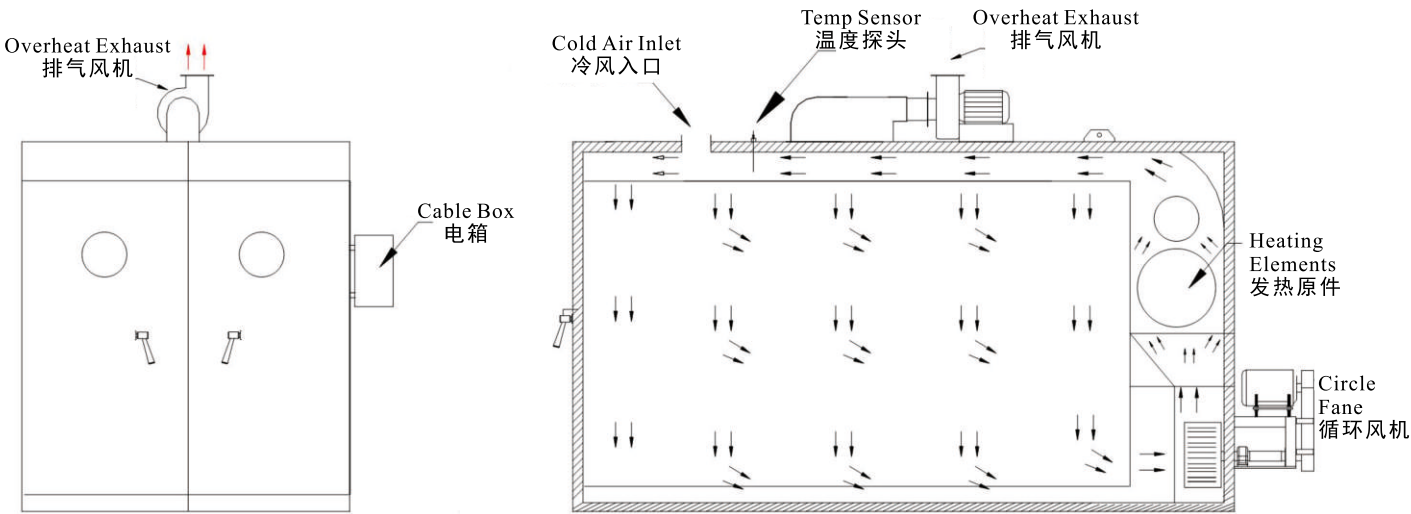

NATURAL GAS RESOURCES 天然气加热

Model	GO-60	GO-90	GO-120	GO-150
Basket Capacity 容量	pcs60	90	120	150
Basket Dim. 装货内胆尺寸	mm1640x1610x1700	2400x1820x1720	3150x1820x1720	4000x1820x1720
Main Motor 循环风机功率	kw3	4	4	5
Exhausting Motor 恒温风机功率	kw0.37	0.37	0.37	0.37
Gas Consumption 耗气量	cm³/h5.8~11.6	5.8~11.6	5.8~11.6	9~17.5
Burner 燃烧头	made in Italia			
Overall Dimension 外形尺寸	mm3390x2010x2500	4500x2220x2570	5600x2220x2570	6740x2220x2070
Net Weight 净重	kg1890	2470	2990	3320

DIESEL OIL RESOURCES 柴油参数

Model	GO-30	GO-60	GO-90	GO-120	GO-150
Basket Capacity 容量	pcs30	60	90	120	150
Basket Dim. 装货内胆尺寸	mm1260x1100x1720	1640x1610x1700	2400x1820x1720	3150x1820x1720	2920x1820x1720
Main Motor 循环风机功率	kw2.2	3	4	4	5
Exhausting Motor 恒温风机功率	kw0.37	0.37	0.37	0.37	0.37
Diesel Oil Consumption 耗柴油量	kg/h2~3	4~5	6~7	8~9	13~15
Overall Dimension 外形尺寸	mm1310	1890	2470	2990	3320
Net Weight 净重	kg2530x1520x2465	2950x2010x2500	4500x2220x2570	4430x2290x2500	5300x2290x2500




Aluminum Trolley
铝制车

Suitable principally for linen transport in industrial laundries and commercial laundries such as for hotel, hospital, care homes, etc.




Model	OTAT-51	
Size 尺寸	mm	1500x930x890
Material 材质	Aluminium alloy 铝合金	
Structure 结构	Half opening truncated cone on the long side to unload material. Horizontal stiffened ribs approx. each 120 mm. 一面半开口，方便装卸布草，每120mm间隔一条加强筋	
Surface treatment 表面处理	light alloy anodised after finishing 成品经轻铝合金电镀	


Plastic Pallet
塑料卡板

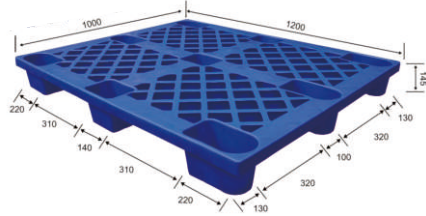

Model 型号: 1# 9 feel Pallet
Size 规格: 1200x1000x145mm

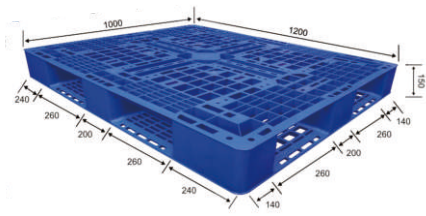

Model 型号: N8# T-type Pallet
Size 规格: 1200x1000x150mm

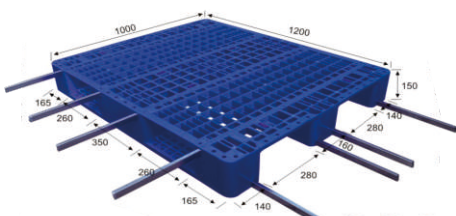

Model 型号: NA20# C-type Pallet
(can place 8pcs steel pipe)
Size 规格: 1200x1000x150mm

Related Product
相关配套产品

PE Spill Containment Decks and Pallets
盛漏平台和盛漏托盘



Model	Spill Deck 盛漏平台			Spill Pallet 盛漏托盘	
LxWxH 尺寸	mm	670x670x150	1320x680x150	1320x1300x150	1320x680x300
Capacity 油桶数量	200L drum	1	2	4	2
Spill Capacity 盛漏容量	Gal/L	10/40	21/80	31/120	31x120
Load Capacity 承重	kg/m ²	693	1361	1361	2772
Forklift Operation 叉车操作		N/A	2 ways	2 ways	2ways
					4 ways

Accessories

 SC-5-1 SC-N1 SC-N2	 CU-11 CU-18 CU-50 CU-65	 DN15 DN20 DN25	 Φ 1 Φ 3/4 Φ 1/2
Contactor made in Japan 日本接触器	Contactor made in Taiwan 台湾接触器	solenoid valve made in Japan 电磁阀日本	solenoid valve made in Taiwan 电磁阀台湾
 Washer Hydro Dryer	 pot 2 pot 3		
Limit switch 行程开关	Rotary switch 开关	Emergency stop button 急停按钮	Press button 按钮
			
Pilot lamp 指示灯	Alarm Lamp 警报灯	Door Handle 干衣机门把	Door support 干衣机门铰
			 L 6" M 4" S 3"
Angle Seat Valve 角助阀	Break 刹车头	Protective tube 保险管	Waterproof rubber gasket for washing machine 洗衣机防水胶垫
			 Washer Hydro Dryer
P-100 Sensor 温度探头	Door Seal 干衣机密封圈	Current limiter 限流器	PLC 编程控制器
			
Heat Exchanger for Dryer (30/60/100/150/200/300/400 Pounds) 干衣机蒸汽箱		Rubber jacket (L/M/S/Kid) 胶衫	Rubber tubes (L/M/S) 胶裤



JIANYE GROUP CO.,LTD.

 ASHINE® Professional Hotel & Restaurant Supplier www.jianyegroup.cn	 ONETOOL Storage Rack Working Station Equipment Steel Office Furniture www.onetool.cn
 JIANYE Air Compressor & Compressed Air Equipment of Purging www.jianyemachine.cn	 敏嘉 CNC Lathe Machine CNC Grinding Machine Turn-Mill Center Vertical Machine Center CNC Special Machine Automatic Product Line Solution www.gzminjia.com/en

Wider Choice, More Opportunities, Better Service.

METRIC TO IMPERIAL UNITS

Length		
1 centimetre (cm)	=	0.394 inch(in)
1 metre (m)	=	3.28 foot(ft)
1 metre (m)	=	1.09 yard(yd)
1 kilometre (km)	=	4.97 furlong(fur)
1 kilometre (km)	=	0.621 mile
Mass		
1 garm(g)	=	0.03527 ounce(oz)
1 kilogarm(kg)	=	2.20 pound(lb)
1 kilogarm(kg)	=	0.157 stone
1 tonne(t)	=	0.984 ton
Area		
1 square centimetre(cm ²)	=	0.155 square inch (in ²)
1 square centimetre(cm ²)	=	10.8 square foot (ft ²)
1 square centimetre(cm ²)	=	1.2 square yard(yd ²)
1 hectare(ha)	=	2.47 acre(ac)
1 square kilometre(km ²)	=	0.386 square mile
Volume		
1 cubic centimetre(cm ³)	=	0.061 cubic inch(in ³)
1 cubic centimetre(cm ³)	=	35.3 cubic foot(ft ³)
1 cubic centimetre(cm ³)	=	0.765 cubic yard(yd ³)
1 cubic centimetre(cm ³)	=	27.5 bushel(bus)
Volume(fluids)		
1 milliliter(ml)	=	0.0352 fluid ounce(fl oz)
1 milliliter(ml)	=	1.76 pint(pt)
1 litre(l)	=	220 gallon(gal)
Force		
1 Newton(N)	=	0.2251 pound-force(lbf)
1 ton-force(tonf)	=	9.96 kilomiewton(kn)

CONTAINER VOLUME TABLE

	L	W	H	Cu m ³
CONTAINER SPC CONTAINER	20"	8'	8'6"	33.1*28
	5.899m	2.352m	2.386m	
	L	W	H	Cu m ³
CONTAINER SPC CONTAINER	40"	8'	8'6"	67.5*57
	12.02m	2.35m	2.386m	
	L	W	H	Cu m ³
CONTAINER SPC CONTAINER	40"	8'	9'6"	76.3*57
	12.02m	2.35m	2.69m	

CONTRAST BETWEEN CELSIUS TEMPERATURES AND
FAHRENHEIT TEMPERATURES

/°C	/°F	/°C	/°F	/°C	/°F
-10	14	9	148.2	28	82.4
-9	15.8	10	50	29	84.2
-8	17.6	11	51.8	30	86
-7	19.4	12	53.6	31	87.8
-6	21.2	13	55.4	32	89.6
-5	23	14	57.2	33	91.4
-4	24.8	15	59	34	93.2
-3	26.6	16	60.8	35	95
-2	28.4	17	62.6	36	96.8
-1	30.2	18	64.4	37	98.6
0	32	19	66.2	38	100.4
1	33.8	20	68	39	102.2
2	35.6	21	69.8	40	104
3	37.4	22	71.6	45	113
4	39.4	23	73.4	50	122
5	41	24	75.2	55	131
6	42.8	25	77	60	140
7	44.6	26	78.8	65	149
8	46.4	27	80.6	70	158
75	167	110	230	170	338
80	176	120	248	180	356
85	185	130	266	190	374
90	194	140	284	200	392
95	203	150	302	210	410
100	212	160	320	220	428

