

# FABRIC SHRINKING AND FORMING MACHINE SERIES | 布料预缩定型机系列

# FABRIC SHRINKING MACHINE 布料预缩定型机

型号MODEL: JY-1200

- ① 蒸汽加湿加热
- ② 量布、叠布

功能特点 FEATURE

- Steam humidification and heating.
- Measurement, folding fabric.



适用于 SUITABLE FOR Knit and woven , a variety of general fabric

技术	参数	TECHNICAL SPE	CIFICATION
型号	Model		JY-1200
电压	Voltag	e&Frequency	AC 220V 50HZ
蒸汽消耗量	Steam	consumption	40kg/h
蒸汽压力	Steam	pressure	0.4-0.7 Mpa
最大可放布直径	Maxim	um roll fabric diameter	40cm
最大工作幅宽	Maxim	um working width	2100mm
工作速度	Workir	ng speed	可调Adjustable 0-20m/min
总功率	Total	Power	0.12kw
外形尺寸	Bound	ary dimension	1200*2610*1260mm



# 国家专利产品 节能40%,保证不滴水 40% ENERGY SAVING, NO DRIPPING WATER 国家专利蒸汽盘&下排汽设计: 内部独特结构 保证不滴水 全密封蒸汽室: 蒸汽不外泄,循环利用,减少蒸汽消耗量 蒸汽盘由多层不锈钢制造,具良好的保温和隔热效果,外壳不会烫手,创造良好工作环境 **NATIONAL PATENT STEAM CHAMBER & DISCHARGE STEAM DOWNWARD DESIGN:** Internal unique structure to ensure no dripping water. Fully sealed unique design steam cover: no leakage of steam, steam cyclic utilization, reduce the steam consumption. Steam cover is made of multilayer stainless steel, good heat preservation and thermal insulation effect, the outer cover will not be hot, create a good working environment. 密封独特结构蒸汽盘 Sealed unique structure steam chamber 下排汽 Discharge steam downward

# 工作原理

# **WORKING PRINCIPLE**

面料预缩定型机是在一定的温度、湿度和压力下,布料处在无张力的状态下,借助面料本身的弹性收缩变形以及织物和纤维的渗透与溶胀原理,消除面料的潜在收缩,完成预缩工作。

Fabric shrinking machine is in a certain of temperature, humidity and pressure, fabric in the tension-free state, with the help of the fabric itself elastic shrinkage deformation, textile and fiber penetration and swelling principle, eliminate the potential shrinkage of fabric, complete the pre-shrinkinking process.

# 机器效益

# **MACHINE EFFICIENCY**


- 稳定面料的缩水率、改善面料物理性能
- 提高面料品质和尺寸稳定性: 防止做出来的衣服变形
- 便于生产,提高效率:经缩水加工后,在裁剪、缝制、整烫过程中无需考虑面料的收缩问题
- 提高服装附加值、提升品牌效益:经缩水加工后布料缩水率控制在国标标准内,尺寸稳定 ,手感更加
- 此缩水机是现代使用CAD/CAM 自动化设备必配的前道布料整理工序机器。
- Stabilize shrinkage rate of fabric、 improve physical properties of fabric
- Improve fabric quality and dimensional stability: prevent finished garment deformation
- Convenient for production, improve efficiency: after shrinking processing, there is no need to consider the shrinkage of fabric in the process of cutting, sewing and ironing
- Increase the added value of garment and brand efficiency: after shrinking, shrinkage rate of fabric is controlled within the national standard, fabric dimension will be stability, feeling better
- The shrinking machine is the necessary previous fabric finishing process machine use with CAD/CAM automatic equipment.



# FABRIC SHRINKING AND FORMING MACHINE SERIES | 布料预缩定型机系列

FABRIC SHRINKING MACHINE 布料预缩定型机

FABRIC INSPECTION AND SHRINKING MACHINE 验布、预缩定型机

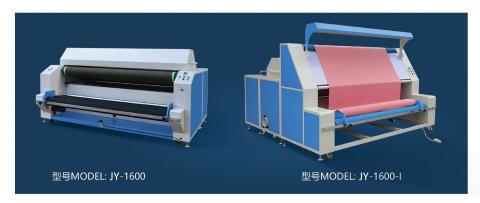

适用于		SUITABLE FOR
适合于针织、梭	织各种常规布料	Knit and woven , a variety of general fabric

技术参数	TECHNICAL SPECIFICATI	ON	
型 <del>목</del>	Model	JY-1600	JY-1600-I
电压	Voltage&Frequency	AC 380	V 50HZ
蒸汽消耗量	Steam consumption	60k	g/h
蒸汽压力	Steam pressure	0.4-0.7 Mpa	
最大可放布直径	Maximum roll fabric diameter	40cm	
最大工作幅宽	Maximum working width	2100mm	
工作速度	Working speed	可调Adjustable, 0-20m/min	
烘干温度	Drying temperature	可调Adjusta	ble,≤200 °C
烘干电热功率	Drying heating power	4kw	
总功率	Total Power	6kw	
外形尺寸	Boundary dimension	1800*2610*1300mm	2415*2610*1700mm

功能	FUNCTION	JY-1600
り用品	FUNCTION	J1-1000

蒸汽加湿加热 电加热烘干 量布、叠布

Steam humidification and heating Electric heating drying Measurement, folding fabric

# 功能 FUNCTION JY-1600-I


蒸汽加湿加热 电加热烘干 验布、量布、叠布


Steam humidification and heating Electric heating drying Fabric inspection Measurement, folding fabric

# 特点 FEATURE

- ① 全密封独特设计蒸汽盘:蒸汽不外泄,减少蒸汽消耗量(比同类型产品节省40%左右),保证无水滴;
- ② 蒸汽盘由两层不锈钢制造,具良好的保温和隔热效果
- ③ 电子眼监控放布,确保布料处于无张力状态下
- 4 无级变频调速
- ⑤ 选用原装进口电器,性能稳定,整机耐用
- 6 选用耐高温铁氟龙网带
- Fully sealed unique design steam cover: no leakage of steam, reduce the steam consumption (save about 40% steam consumption than other type product), ensure no dripping water.
- The steam cover is made of two layers of stainless steel, good heat preservation and thermal insulation effect.
- Electronic eye monitoring releasing fabric, make sure fabric is in the tension-free state.
- Stepless Frequency speed regulation.
- Equipped with original imported electrical appliances, stable performance, machine is durable.
- Use high temperature resistant Teflon mesh belt.


# 结构示意图 STRUCTURAL DIAGRAM 单位Unit:mm







# FABRIC SHRINKING MACHINE 布料预缩定型机

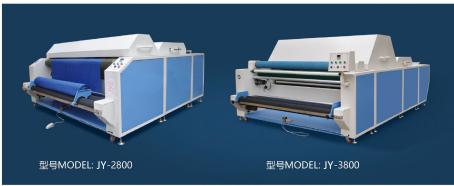

适用于		SUITABLE FOR
适合于针织、梭	织各种常规布料。	
Knit and wover	n ,a variety of general fabric.	

技术参数	技术参数 TECHNICAL SPECIFICATION				
型号	Model	JY-2800	JY-3800		
电压	Voltage&Frequency	AC 380V 50HZ			
蒸汽消耗量	Steam consumption	60kg/h	100kg/h		
蒸汽压力	Steam pressure	0.4-0.7 Mpa			
最大可放布直径	Maximum roll fabric diameter	40cm			
最大工作幅宽	Maximum working width	2100mm			
工作速度	Working speed	可调Adjustable, 0-20m/min			
烘干温度	Drying temperature	可调Adjustable,≤200 ℃			
烘干电热功率	Drying heating power	6kw			
总功率	Total Power	8kw	9kw		
外形尺寸	Boundary dimension	2800*2610*1650mm	4000*2610*1650mm		

# 功能 FUNCTION JY-2800

蒸汽加湿加热 烘干由蒸汽加热为主,电加热为辅 采用风扇冷却装置,急速冷却布料,使面料尺寸稳定量布、叠布

Steam humidification and heating Drying is mainly by steam heating, electric heating as auxiliary Adopt fan cooling device, quickly cooling fabric, stabilize fabric size Measurement, folding fabric

# FABRIC SHRINKING AND FORMING MACHINE SERIES | 布料预缩定型机系列

# 功能 FUNCTION

# JY-3800

蒸汽加湿加热 烘干由蒸汽加热为主,电加热为辅,既达到节能效果也能满足不同布料对温度的要求 采用强力吸风冷却装置,急速冷却布料,使面料尺寸稳定 振动功能,让纤维能自然蓬松 梳理面料、量布、叠布

Steam humidification and heating

Drying is mainly by steam heating, electric heating is auxiliary. Not only for save energy but also meet the temperature requirements of different fabric.

Adopt strong cooling device, quickly cooling fabric, stabilize fabric size

Spreading fabric , Measurement, folding fabric


Vibration function allow the fiber to be fluffy naturally.


# 特点 FEATURE

- 全密封独特设计蒸汽盘:蒸汽不外泄,减少蒸汽消耗量(比同类型产品节省40%左右),保证无水滴;
- ② 蒸汽盘由两层 (JY-2800) 、三层 (JY-3800) 不锈钢制造,具良好的保温和隔热效果
- ③ 电子眼监控放布,确保布料处于无张力状态下
- 4 无级变频调速
- 6 选用原装进口电器,性能稳定,整机耐用
- 电子眼自动调带,无需担忧输送带跑偏,遇到故障自动停机
- ⑦ 选用耐高温铁氟龙网带
- Fully sealed unique design steam cover: no leakage of steam, reduce the steam consumption (save about 40% steam
  consumption than other type product), ensure no water dripping.
- The steam cover is made of two layer(JY-2800), three layer(JY-3800),good heat preservation and thermal insulation effect.
- Electronic eye monitor releasing fabric , make sure fabric is in the tension-free state.
- Stepless Frequency speed regulation.
- Equipped with original imported electrical appliances, stable performance,machine is durable.
- Electronic eye automatically adjusts the mesh belt no need to worry about mesh belt running off, automatically stop working
  in case of failure
- Use high temperature resistant Teflon mesh belt.

# 结构示意图 STRUCTURAL DIAGRAM

# 单位Unit:mm







# FABRIC SHRINKING AND FORMING MACHINE SERIES | 布料预缩定型机系列

# **FABRIC SHRINKING MACHINE**



# 适用于

# SUITABLE FOR

JY-4800: 适合于针织、梭织各种常规布料。特别适合于真丝,毛织品、麻织品 Knit and woven , a variety of general fabric. Especially suitable for silk, wool, linen

JY-4800-A: 特别适用于机织棉麻布、棉麻化纤布、毛呢料等吸水性较强的面料

Special for cotton and linen weaving fabric, cotton and linen chemical fabric, woolen fabric and other fabric with strong water-absorbing.

技术参数	技术参数 TECHNICAL SPECIFICATION			
型号	Model	JY-4800	JY-4800-A	
电压	Voltage&Frequency	AC 380	V 50HZ	
蒸汽消耗量	Steam consumption	100	kg/h	
蒸汽压力	Steam pressure	0.4-0.	7 Мра	
最大可放布直径	径 Maximum roll fabric diameter	40	)cm	
最大工作幅宽	Maximum working width	210	0mm	
工作速度	Working speed	可调Adjustabl	e, 0-20m/min	
烘干温度	Drying temperature	可调Adjusta	able,≤200 °C	
烘干电热功率	Drying heating power	1.	2kw	
总功率	Total Power	1	5kw	
外形尺寸	Boundary dimension	5000*2610*1650mm	5000*2610*1650mm 5750*2610*1650mm	

# 功能 FUNCTION JY-4800

蒸汽加湿加热 烘干由蒸汽加热为主,电加热为辅,既达到节能效果也能满足不同布料对温度的要求

采用强力吸风冷却装置,急速冷却布料,使面料尺寸稳定 振动功能,让纤维能自然蓬松 梳理面料、量布、叠布

Steam humidification and heating

Drying is mainly by steam heating, electric heating is auxiliary. Not only for save energy but also meet the temperature requirements of different fabric.

Adopt strong cooling device, quickly cooling fabric, stabilize fabric size.

Vibration function allow the fiber to be fluffy naturally.

Spreading fabric 、Measurement、folding fabric.

# 功能 FUNCTION JY-4800-A

# 喷雾加湿,特别适用于吸水性较强的面料,缩水效果更佳

蒸汽加湿加热 烘干由蒸汽加热为主,电加热为辅。既达到节能效果也能满足不同布料对温度的要求

采用强力吸风冷却装置,急速冷却布料,使面料尺寸稳定 振动功能,让纤维能自然蓬松 梳理面料、量布、叠布

Spraying humidifying ,especially suitable for the fabric with strong water-absorbing, better shrinkage effect Steam humidification and heating

Drying is mainly by steam heating, electric heating is auxiliary. Not only for save energy but also meet the temperature requirements of different fabric.

Adopt strong cooling device, quickly cooling fabric, stabilize fabric size

Vibration function allow the fiber to be fluffy naturally.


Spreading fabric , Measurement, folding fabric


# 特点 FEATURE

- 全密封独特设计蒸汽盘:蒸汽不外泄,减少蒸汽消耗量(比同类型产品节省40%左右),保证无水滴;
- ② 蒸汽盘由三层不锈钢制造,具良好的保温和隔热效果
- ③ 电子眼监控放布,确保布料处于无张力状态下
- 4 无级变频调速
- ⑤ 选用原装进口电器,性能稳定,整机耐用
- ⑥ 电子眼自动调带,无需担忧输送带跑偏,遇到故障自动停机
- ② 选用耐高温铁氟龙网带
- Fully sealed unique design steam cover: no leakage of steam, reduce the steam consumption (save about 40% steam
  consumption than other type product), ensure no dripping water.
- The steam cover is made of three layers of stainless steel,good heat preservation and thermal insulation effect.
- Electronic eye monitor releasing fabric , make sure fabric is in the tension-free state.
- Stepless Frequency speed regulation.
- Equipped with original imported electrical appliances, stable performance, machine is durable.
- Electronic eye automatically adjusts the mesh belt no need to worry about mesh belt running off, automatically stop working
  in case of failure.
- Use high temperature resistant Teflon mesh belt.

# 结构示意图 STRUCTURAL DIAGRAM

# 单位Unit:mm







# FABRIC SHRINKING AND FORMING MACHINE SERIES | 布料预缩定型机系列

# FABRIC SHRINKING MACHINE (WITH AUTOMATIC EDGE ALIGNMENT FUNCTION) 布料预缩定型机(带自动对边功能)

型号MODEL: JY-4800-ED-H



# 适用于

# SUITABLE FOR

适合于针织、梭织各种常规布料。

Knit and woven, a variety of general fabric.

技术参数	TECHNICAL SPECIFICATION	
型号	Model	JY-4800-ED-H
电压	Voltage&Frequency	AC 380V 50HZ
蒸汽消耗量	Steam consumption	100kg/h
蒸汽压力	Steam pressure	0.4-0.7 Mpa
最大可放布直径	Maximum roll fabric diameter	40cm
最大工作幅宽	Maximum working width	2100mm
工作速度	Working speed	可调Adjustable, 0-20m/min
烘干温度	Drying temperature	可调Adjustable,≤200 ℃
排汽电机功率	Discharge steam motor power	0.8kw
进布电机功率	Feeding fabric motor power	0.12kw
摆布电机功率	Sway folding motor power	0.37kw
输送带电机功率	Belt working motor power	0.37kw
梳布电机功率	Spreading fabric motor power	0.09kw
振动电机功率	Vibration motor power	0.09kw
吸风电机功率	Suction motor power	0.8kw
烘干电热功率	Drying heating power	6kw
总功率	Total Power	9kw
外形尺寸	Boundary dimension	5070*2610*1650mm

# 功能 FUNCTION

蒸汽加湿加热 烘干由蒸汽加热为主,电加热为辅。既达到节能效果也能满足不同布料对温度的要求 采用强力吸风冷却装置,急速冷却布料,使面料尺寸稳定 振动功能,让纤维能自然蓬松 梳理面料、量布、叠布、自动对边

Steam humidification and heating

Drying is mainly by steam heating, electric heating is auxiliary. Not only for save energy but also meet the temperature requirements of different fabric.

Adopt strong cooling device, quickly cooling fabric, stabilize fabric size

Vibration function allow the fiber to be fluffy naturally.

Spreading fabric , Measurement, folding fabric, Automatic edge alignment function.

# 特点 FEATURE

- 全密封独特设计蒸汽盘:蒸汽不外泄,减少蒸汽消耗量(比同类型产品节省40%左右),保证无水滴;
- ② 蒸汽盘由三层不锈钢制造,具良好的保温和隔热效果
- ③ 电子眼监控放布,确保布料处于无张力状态下
- 4 无级变频调速
- ⑤ 选用原装进口电器,性能稳定,整机耐用
- 电子眼自动调带,无需担忧输送带跑偏,遇到故障自动停机
- 加热区和冷却区使用两条独立网带,增加网带的使用寿命
- 8 选用耐高温铁氟龙网带
- Fully sealed unique design steam cover: no leakage of steam, reduce the steam consumption (save about 40% steam
  consumption than other type product), ensure no dripping water.
- The steam cover is made of three layers of stainless steel, good heat preservation and thermal insulation effect.
- Electronic eye monitor releasing fabric, make sure fabric is in the tension-free state.
- Stepless Frequency speed regulation.
- Equipped with original imported electrical appliances, stable performance, machine is durable.
- Electronic eye automatically adjusts the mesh belt no need to worry about mesh belt running off, automatically stop working in case of failure.
- · Heating area and cooling area use two independent mesh belts to increase the service life of the mesh belt.
- Use high temperature resistant Teflon mesh belt.

# 结构示意图 STRUCTURAL DIAGRAM 单位Unit:mm 烘干区 蒸汽区 drying area steam area 冷却区 进布区 (卷布进) cooling area -Input fabric area (rolled fabric) 自动对边松布区 Auto edge alignment folding fabric area 1670 1300 1250 <sup>8</sup>650



# **FABRIC SHRINKING MACHINE** 布料预缩定型机

型号MODEL: JY-6800





# 适用于

# SUITABLE FOR

适合于针织、梭织各种常规布料。特别适合于纯棉,真丝,毛织品、麻织品,合成纤维及混纺织品

Knit and woven, a variety of general fabric. Especially suitable for pure cotton, silk, wool, linen, synthetic fiber and mixed textiles

技术参数	TECHNICAL SPECIFICATION	
型号	Model	JY-6800
电压	Voltage&Frequency	AC 380V 50HZ
蒸汽消耗量	Steam consumption	200kg/h
蒸汽压力	Steam pressure	0.4-0.7 Mpa
最大可放布直径	Maximum roll fabric diameter	40cm
最大工作幅宽	Maximum working width	2100mm
工作速度	Working speed	可调Adjustable, 0-20m/min
烘干温度	Drying temperature	可调Adjustable,≤200 ℃
排汽电机功率	Discharge steam motor power	0.8kw*2
进布电机功率	Feeding fabric motor power	0.12kw
摆布电机功率	Sway folding motor power	0.37kw
输送带电机功率	Belt working motor power	0.37kw
梳布电机功率	Spreading fabric motor power	0.09kw
振动电机功率	Vibration motor power	0.09kw
吸风电机功率	Suction motor power	0.8kw
烘干电热功率	Drying heating power	16kw
总功率	Total Power	20kw
外形尺寸	Boundary dimension	7000*2610*1650mm

# FABRIC SHRINKING AND FORMING MACHINE SERIES | 布料预缩定型机系列

# **FUNCTION**

电加热预热, 加热输送带, 防止有水珠

双蒸汽区。布料收缩效果更好、机器工作效率更高

双烘干区。烘干由蒸汽加热为主,电加热为辅。既达到节能效果也能满足不同布料对温度的要求

采用强力吸风冷却装置,急速冷却布料,使面料尺寸稳定 振动功能, 让纤维能自然蓬松

梳理面料、量布、叠布

Pre-heating by electric heating, heating mesh belt, prevent water droplets.

Double steam area, fabric shrinkage effect will be better, machine working efficiency higher.

Two drying area. Drying is mainly by steam heating, electric heating is auxiliary. Not only for save energy but also meet the temperature requirements of different fabric.

Adopt strong cooling device, quickly cooling fabric, stabilize fabric size.

Vibration function allow the fiber to be fluffy naturally.

Spreading fabric , Measurement, folding fabric.

### 特点 **FEATURE**

- 全密封独特设计蒸汽盘:蒸汽不外泄,减少蒸汽消耗量(比同类型产品节省40%左右),保证无水滴;
- ② 蒸汽盘由三层不锈钢制造,具良好的保温和隔热效果
- ③ 电子眼监控放布,确保布料处于无张力状态下
- 4 无级变频调速
- ⑤ 选用原装进口电器,性能稳定,整机耐用
- ⑥ 电子眼自动调带,无需担忧输送带跑偏,遇到故障自动停机
- 选用耐高温铁氟龙网带
- Fully sealed unique design steam cover; no leakage of steam, reduce the steam consumption (save about 40% steam) consumption than other type product), ensure no dripping water.
- The steam cover is made of three layers of stainless steel,good heat preservation and thermal insulation effect
- Electronic eye monitor releasing fabric, make sure fabric is in the tension-free state.
- Stepless Frequency speed regulation.
- Equipped with original imported electrical appliances, stable performance, machine is durable.
- Electronic eye automatically adjusts the mesh belt no need to worry about mesh belt running off, automatically stop working
- Use high temperature resistant Teflon mesh belt.

# 结构示意图 STRUCTURAL DIAGRAM 单位Unit:mm 蒸汽区 烘干区 steam area drying area 预热区 冷却区 pre-heating area cooling area 进布区(卷布进) Input fabric area ( rolled fabric) 松布区 Folding fabric area 1250 1000 1250



# 「中作打火油足主力ルデッ」 | TABRIC STININGING AND FORMING MACHINE SERIE

# FABRIC SHRINKING MACHINE 布料预缩定型机

型号MODEL: JY-8800





# 适用于

# SUITABLE FOR

适合于针织、梭织各种常规布料。特别适合于纯棉,真丝,毛织品、麻织品,合成纤维及混纺织品。

Knit and woven, a variety of general fabric. Especially suitable for pure cotton, silk, wool, linen, synthetic fiber and mixed textiles

技术参数	TECHNICAL SPECIFICATION	
型号	Model	JY-8800
电压	Voltage&Frequency	AC 380V 50HZ
蒸汽消耗量	Steam consumption	200kg/h
蒸汽压力	Steam pressure	0.4-0.7 Mpa
最大可放布直径	Maximum roll fabric diameter	40cm
最大工作幅宽	Maximum working width	2100mm
工作速度	Working speed	可调Adjustable, 0-20m/min
烘干温度	Drying temperature	可调Adjustable,≤200 ℃
排汽电机功率	Discharge steam motor power	0.8kw*2
进布电机功率	Feeding fabric motor power	0.12kw
摆布电机功率	Sway folding motor power	0.37kw
输送带电机功率	Belt working motor power	0.37kw
梳布电机功率	Spreading fabric motor power	0.09kw
振动电机功率	Vibration motor power	0.09kw
吸风电机功率	Suction motor power	0.8kw
烘干电热功率	Drying heating power	28kw
总功率	Total Power	32kw
外形尺寸	Boundary dimension	9000*2610*1650mm

# FABRIC SHRINKING AND FORMING MACHINE SERIES | 布料预缩定型机系列

# 功能 FUNCTION

电加热预热,加热输送带,防止有水珠 双蒸汽区。布料收缩效果更好、机器工作效率更高四烘干区。烘干由蒸汽加热为主,电加热为辅。既达到节能效果也能满足不同布料对温度的要求

振动功能, 让纤维能自然蓬松 梳理面料、量布、叠布

Pre-heating by electric heating, heating mesh belt, prevent water droplets.

Double steam area, fabric shrinkage effect will be better , machine working efficiency higher.

Four drying area. Drying is mainly by steam heating, electric heating is auxiliary. Not only for save energy but also meet the temperature requirements of different fabric.

Vibration function allow the fiber to be fluffy naturally.

Spreading fabric , Measurement, folding fabric.

# 特点 FEATURE

- ① 全密封独特设计蒸汽盘:蒸汽不外泄,减少蒸汽消耗量(比同类型产品节省40%左右),保证无水滴;
- 2 蒸汽盘由三层不锈钢制造,具良好的保温和隔热效果
- ③ 电子眼监控放布,确保布料处于无张力状态下
- 4 无级变频调速
- ⑤ 选用原装进口电器,性能稳定,整机耐用
- 6 电子眼自动调带,无需担忧输送带跑偏,遇到故障自动停机
- Fully sealed unique design steam cover: no leakage of steam, reduce the steam consumption (save about 40% steam
  consumption than other type product), ensure no dripping water.
- The steam cover is made of three layers of stainless steel, good heat preservation and thermal insulation effect
- Electronic eye monitor releasing fabric , make sure fabric is in the tension-free state.
- Stepless Frequency speed regulation.
- Equipped with original imported electrical appliances, stable performance, machine is durable.
- Electronic eye automatically adjusts the mesh belt no need to worry about mesh belt running off, automatically stop working
  in case of failure.
- Use high temperature resistant Teflon mesh belt.


# 结构示意图 STRUCTURAL DIAGRAM 单位Unit:mm 烘干区 drying area 冷却区 cooling area 松布区 Folding fabric area 1000 1000 1250 1000 1000 1250 1750 650



# FABRIC SHRINKING MACHINE 布料预缩定型机



技术参数	技术参数 TECHNICAL SPECIFICATION				
型号	Model	JY-8800-F-H	JY-8800-SH		
电压	Voltage&Frequency	AC 380V 50HZ			
蒸汽消耗量	Steam consumption	2001	kg/h		
蒸汽压力	Steam pressure	0.4-0.7 Mpa			
最大可放布直径	Maximum roll fabric diameter	40cm			
最大工作幅宽	Maximum working width	2100mm			
工作速度	Working speed	可调Adjustable, 0-20m/min			
烘干温度	Drying temperature	可调Adjustable,≤200 ℃			
烘干电热功率	Drying heating power	28kw			
缩水机总功率	Shrinking machine total power	32kw			
外形尺寸	Boundary dimension	9590*2610*1650mm	10690*2610*1420mm		

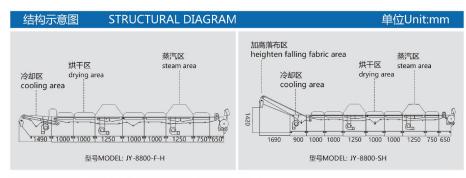

# FABRIC SHRINKING AND FORMING MACHINE SERIES | 布料预缩定型机系列

# 功能 FUNCTION

JY-8800-F-H

JY-8800-SH

电加热预热,加热输送带,防止有水珠;

Pre-heating by electric heating, heating mesh belt, prevent water droplets.

双蒸汽区。布料收缩效果更好、机器工作效率更高;

Double steam area, fabric shrinkage effect will be better , machine working efficiency higher.

振动功能, 让纤维能自然蓬松;

Vibration function allow the fiber to be fluffy naturally.

梳理面料、量布、叠布;

Spreading fabric , Measurement, folding fabric.

四个烘干区。烘干由蒸汽加热为主,电加热为辅。既达到节能效果也能满足不同布料对温度的要求;

Four drying areas. Drying is mainly by steam heating, electric heating is auxiliary. Not only for save energy but also meet the temperature requirements of different fabric.

冷却区采用强力吸风和冷风装置,冷却效果更好。

Cooling area adopt strong suction and cold air device, cooling effect better

采用强力吸风冷却装置,急速冷却布料,使面料尺寸稳定; Adopt strong cooling device, quickly cooling fabric, stabilize fabric size.

带加高落布装置,特别适合于纺织厂使用。

With Heighten falling fabric device, especially suitable for textile factory.

# 特点 FEATURE

JY-8800-F-H

JY-8800-SH

全密封独特设计蒸汽盘:蒸汽不外泄,减少蒸汽消耗量(比同类型产品节省40%左右),保证无水滴; Fully sealed unique design steam cover: no leakage of steam, reduce the steam consumption (save about 40% steam consumption than other type product), ensure no dripping water.

蒸汽盘由三层不锈钢制造, 具良好的保温和隔热效果;

The steam cover is made of three layers of stainless steel, good heat preservation and thermal insulation effect.

电子眼监控放布,确保布料处于无张力状态下;

Electronic eye monitoring releasing fabric, make sure fabric is in the tension-free state.

无级变频调速;

Stepless frequency speed regulation.

选用原装进口电器,性能稳定,整机耐用;

Equipped with original imported electrical appliances, stable performance, machine is durable.

加热区和冷却区使用两条独立网带,增加网带的使用寿命;

Heating area and cooling are use two independent mesh belt for increasing the service life of the mesh belt.

电子眼自动调带,无需担忧输送带跑偏,遇到故障自动停机。

Electric eye automatically adjusts the mesh belt, will automatically stop running in case of failure.

选用耐高温铁氟龙网带;

Use high temperature resistant Teflon mesh belt.

选配:内置电蒸汽发生器,一体化设计。

Option:Inbuilt with electric steam generator,integrated design



# 适用于

SUITABLE FOR

适合于针织、梭织各种常规布料。特别适合于纯棉,真丝,毛织品、麻织品,合成纤维及混纺织品。

Knit and woven, a variety of general fabric. Especially suitable for pure cotton, silk, wool, linen, synthetic fiber and mixed textiles